

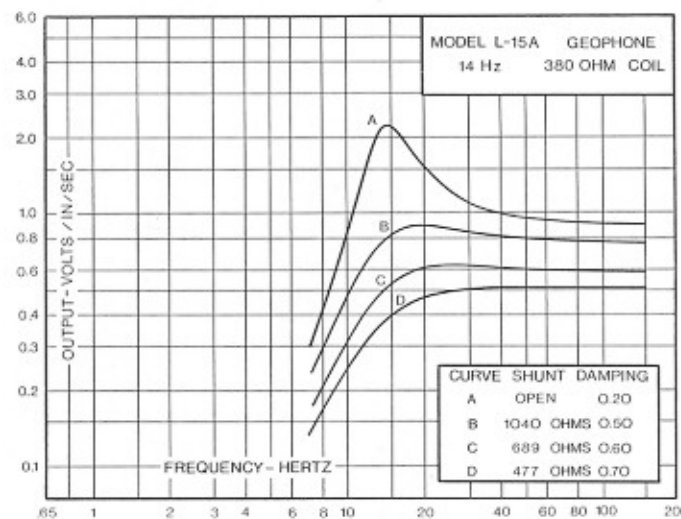
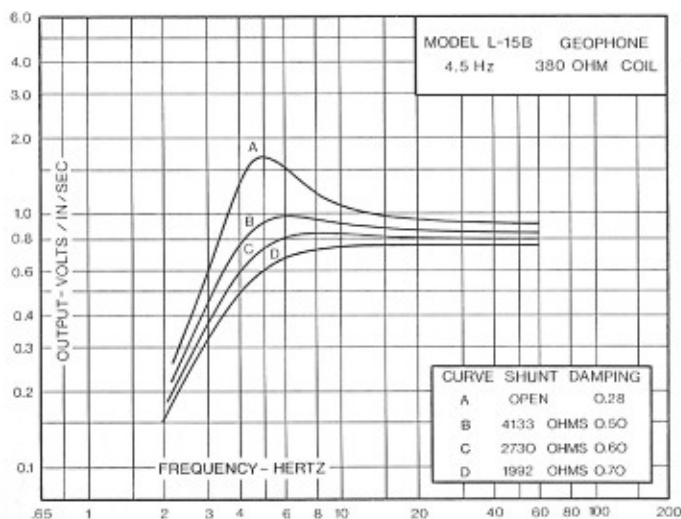


	L-15A	L-15B
Standard Frequency Range, Hz	10-40	4.5-10
Frequency Tolerance	± 5%	± 0.5 Hz
Standard Coil Resistance, Ohms	150/240/380	150/240/380
Resistance Tolerance, %	5 5 5	5 5 5
Maximum Distortion @ 0.7 in/s @ 12 Hz or Resonance	0.2%	0.2%
Transduction Constant, V/in/s ± 10%	$0.047 \sqrt{R_c}$	$0.047 \sqrt{R_c}$
Open Circuit Damping, ± 10%	$\frac{2.739}{f}$	$\frac{1.253}{f}$
Coil Current Damping	$\frac{15.93 R_c}{f(R_c + R_s)}$	$\frac{11.84 R_c}{f(R_c + R_s)}$
Suspended Mass, Grams	17.10	23.00
Power Sensitivity, mW/in/s	2.21	2.21
Case-to-Coil Motion, in. p-p	0.080	0.080
Basic Unit Diameter, in.	1.25	1.25
Basic Unit Height, in.	1.4	1.4
Basic Unit Weight, oz.	5.0	5.0

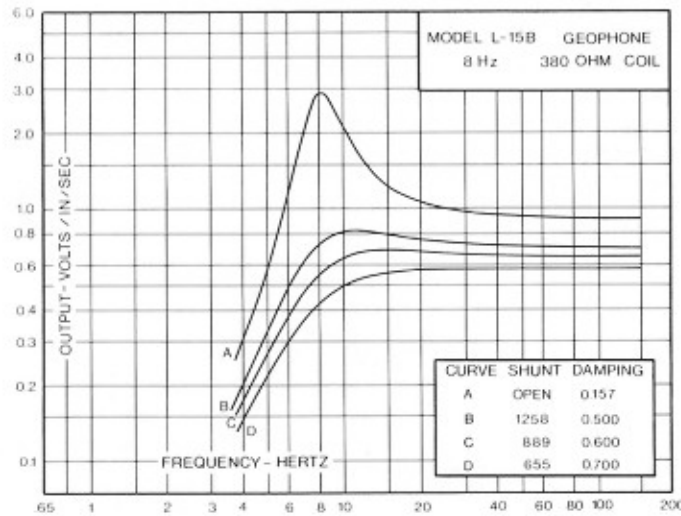

MARK PRODUCTS, U.S. INC.
Area 713/498-0600
10507 Kinghurst Dr.
Houston, Texas 77099
Telex 76-2069

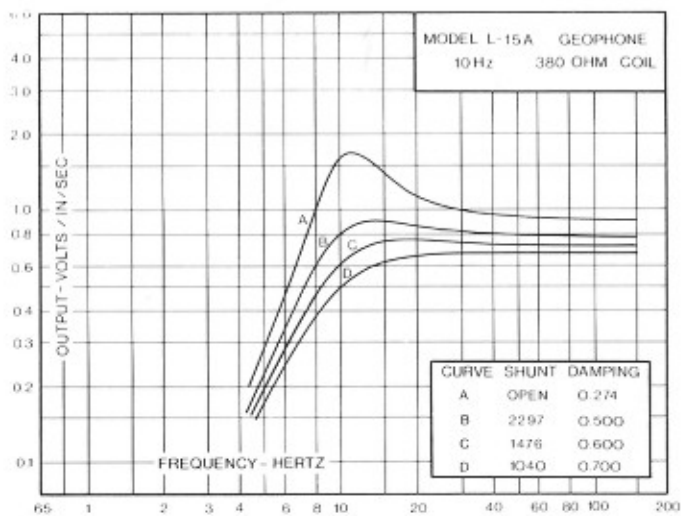

MARK PRODUCTS, LTD.
Area 403/275-3544
1108 55th Ave. N.E.
P.O. Box 73
Calgary, Alberta, Canada T2P-2G9